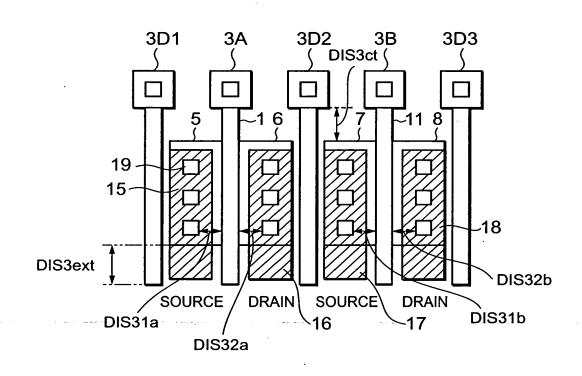


Fig.1








Fig.2

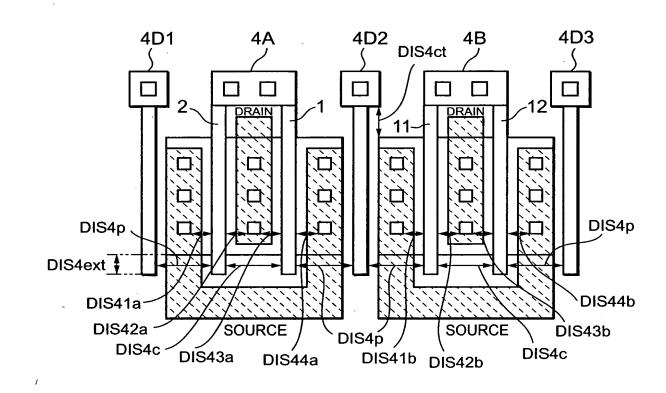

DRAFTSMAN

Fig.3

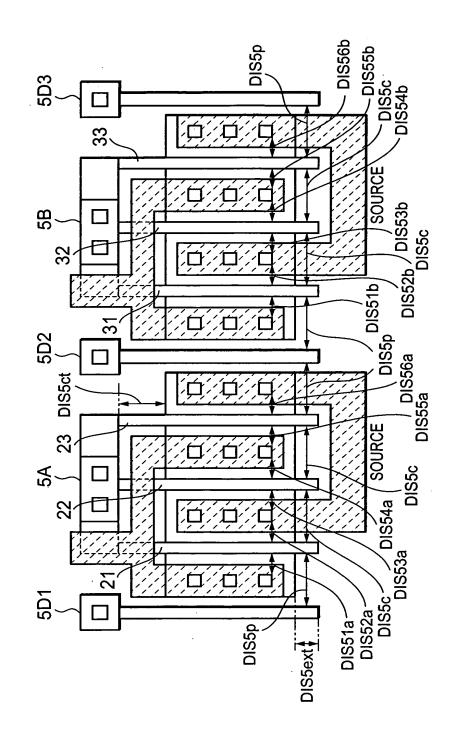

4/6

Fig.4

[TABLE 1] EXPECTED W=10 μ m DISPERSION(Δ W=0.2 μ m) <AS ESTIMATED>

[TABLE 2] EXPECTED W=15 μm DISPERSION(Δ W=0.2 μm) <AS ESTIMATED>

OF	(a) MASK- DESIGN VALUE	(b) DIS- PERSION (ΔW)	ĞATE	(d) SUM OF ACTUAL GATE WIDTHS	OF	(a) MASK- DESIGN VALUE	PÉRSION		(d) SUM OF ACTUAL GATE WIDTHS
1	10.2	0.2	10	10	1	15.2	0.2	15	15
2	5.2	1	5	10	2	7.7	↓	7.5	15
3	3.54	↓	3.34	10.02	3	5.2	↓	5	15
4	2.7	. ↓	2.5	10	4	3.96	↓ _	3.76	15.04
5	2.2	↓	2	10	5	3.2	. ↓	3	15
6	1.87	1	1.67	10.02	6	2.7	↓	2.5	15

[TABLE 3] EXPECTED W=10 μ m DISPERSION(Δ W=0 μ m) <ESTIMATION Δ W-0.2 μ m>

[TABLE 4] EXPECTED W=15 μ m DISPERSION(Δ W=0 μ m) <ESTIMATION Δ W-0.2 μ m>

OF	(a) MASK- DESIGN VALUE	(b) DIS- PERSION (ΔW)	(c) ACTUAL GATE WIDTH	(d) SUM OF ACTUAL GATE WIDTHS	OF	(a) MASK- DESIGN VALUE	(b) DIS- PERSION (ΔW)	(c) ACTUAL GATE WIDTH	(d) SUM OF ACTUAL GATE WIDTHS
1	10.2	0	10.2	10.2	1	15.2	0	15.2	15.2
2	5.2	1	5.2	10.4	2	7.7	↓	7.7	15.4
3	3.54	↓ ↓	3.54	10.64	3	5.2	↓	5.2	15.6
4	2.7	↓	2.7	10.8	4	3.96	↓	3.96	15.84
5	2.2	Į	2.2	11	5	3.2	1 :	3.2	16
6	1.87	Į į	1.87	11.22	6	2.7	 	2.7	16.2

[TABLE 5] EXPECTED W=10 μ m DISPERSION(Δ W=0.4 μ m) <ESTIMATION. Δ W+0.2 μ m>

[TABLE 6] EXPECTED W=15 μ m DISPERSION(Δ W=0.4 μ m) <ESTIMATION Δ W+0.2 μ m>


OF	(a) MASK- DESIGN VALUE	(b) DIS- PERSION (ΔW)		(d) SUM OF ACTUAL GATE WIDTHS			(b) DIS- PERSION (ΔW)		(d) SUM OF ACTUAL GATE WIDTHS
1	10.2	0.4	9.8	9.8	1	15.2	0.4	14.8	14.8
2	5.2	Į.	4.8	9.6	2	7.7	Ţ	7.3	14.6
3	3.54	↓	3.14	9.42	3	5.2	Ţ	4.8	14.4
4	2.7	↓	2.3	9.2	4	3.96	1	3.56	14.24
5	2.2	↓	1.8	9	5	3.2	1	2.8	14
6	1.87	Ţ	1.47	8.82	6	2.7	l l	2.3	13.8

THE REPORT OF THE PROPERTY OF

DRAFTSMAN

5/6

Fig.5

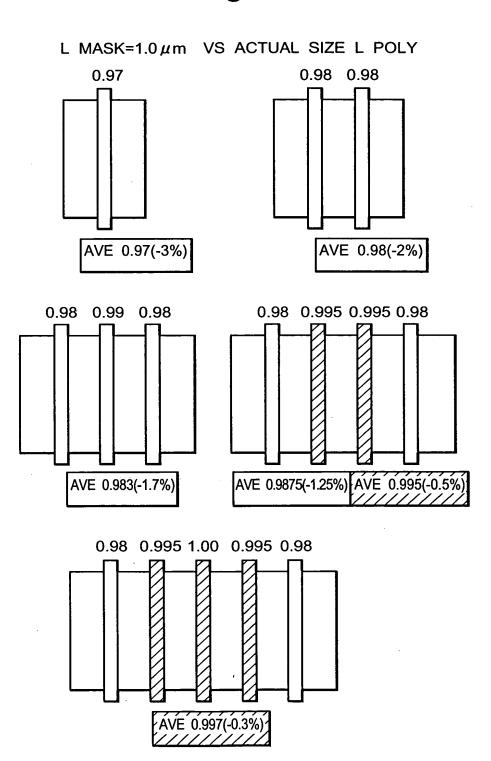





6/6

Fig.6

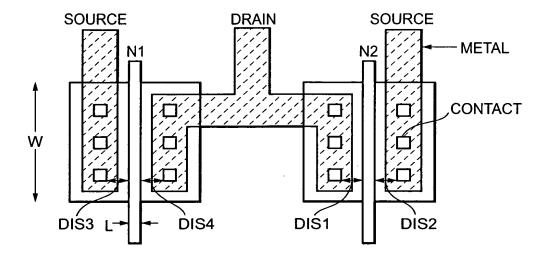


Fig.7




Fig.8

